



INVESTOR IN PEOPLE


The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed   
Dated 25 November 2003

Patent 1977  
R

THE PATENT OFFICE  
NEWPORT



1/77

- 9 SEP 2000

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

1. Your reference

2. Patent application number  
(The Patent Office will fill in this part)

0022119.2

- 9 SEP 2000

3. Full name, address and postcode of the or of each applicant (underline all surnames)

ALAN ROGER HARPER  
UNIT ONE, DELAWARE ROAD,  
GUNNISLAKE,  
CORNWALL, PL18 9AR.

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

3425 498002

4. Title of the invention

PRODUCTION OF COMPOSITE MOULDINGS

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

ALPHA & OMEGA

CHINE CROFT, EAST HILL,  
OTTERY ST MARY,  
DEVON, EX11 1PJ.

Patents ADP number (if you know it)

4119699004

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

- a) any applicant named in part 3 is not an inventor, or
- b) there is an inventor who is not named as an applicant, or
- c) any named applicant is a corporate body.

See note (d))

NO

# Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description

Claim(s)

Abstract

Drawing(s)

11

2

1

4 + 4

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

1

Request for substantive examination (Patents Form 10/77)

1

Any other documents  
(please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature

Date

8 SEP 00

AGENTS FOR THE APPLICANT/S

12. Name and daytime telephone number of person to contact in the United Kingdom

M. BROWN

01404 815159

## Warning

*After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.*

## Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

## **PRODUCTION OF COMPOSITE MOULDINGS**

### **Field of the Invention**

This invention relates to the production of composite mouldings.

The composite industry is commonly known as the grp (glass-reinforced plastics) industry, or the frp (fibre-reinforced plastics) industry and encompasses the production of composite mouldings for a large number of sectors of industrial application. These include the automotive, bus and truck, marine and aerospace industries. In these sectors, many composite moulded parts will have surface areas well in excess of 1 square metre. For example, a boat moulding could have a surface area within the range of from 10 to 1000 square metres.

The production of composites involves the use of two basic raw materials. One is a thermosetting liquid resin and the other is a

fibre (usually a glass fibre). The traditional method of manufacture has involved laying the two materials in an open mould and consolidating them manually to the desired moulding thickness.

As a result of ever-increasing global legislation demanding reduction in hazardous conditions and dust, and general improvements in working conditions, the open moulding of composite parts is on the decline in favour of closed mould production methods. In these, a matched pair of moulds is employed to create a cavity between them such that, when the two moulds are held in closed registration, the defined cavity faithfully represents the shape and thickness of the desired mould part.

Closed mould sets vary within the industry, ranging from heavy duty rigid mould sets, which are designed to withstand high compression or resin injection pressures, to thin closed mould sets which are designed to be held together with the aid of vacuum within their cavities.

The large surface areas of these mould sets create manufacturing problems, i.e. it is difficult to maintain the required tolerance of part thickness and shape.

It is accordingly an object of the present invention to provide an improved method of making composite mouldings. It is also an object of the present invention to provide an improved form of composite closed mould production facility.

### **Summary of the Invention**

According to a first aspect of the present invention there is provided a method of making a composite moulding which includes:-

- providing a pair of mould elements which define a mould cavity,

- feeding a resin mix into the mould cavity, and

- providing means for sensing distortion of a mould element and generating an output signal when a predetermined degree of distortion is sensed.

The output signal is preferably supplied to control means controlling the feeding of the resin mix into the mould cavity.

According to a second aspect of the present invention there is provided a composite closed mould production facility which includes:-

- a pair of mould elements which define a mould cavity,

- means for feeding a resin mix into the mould cavity,

- means for sensing distortion of a mould element, and

- means for generating an output signal when a predetermined degree of distortion is sensed.

### **Brief Description of the Drawings**

Figure 1 is a diagrammatic perspective view of an inner mould element fitted with a first form of sensor system,

Figure 2A shows the sensor system of Figure 1 with the inner mould element in an undeflected condition,

Figure 2B shows the sensor system of Figure 1 with the inner mould element in a deflected condition,

Figure 3 is a diagrammatic perspective view of an inner mould element fitted with a second form of sensor system,

Figure 4A shows the sensor system of Figure 3 with the inner mould element in an undeflected condition, and

Figure 4B shows the sensor system of Figure 3 with the inner mould element in a deflected condition.

### **Description of the Preferred Embodiments**

As shown in Figure 1, an inner mould element 1 has a moulding surface 3 which represents the inner surface half of a matched mould pair. For convenience, the outer mould element has not been shown in the drawings. It will be appreciated that the spacing between the inner and outer mould elements determines the thickness of the formed composite moulding and that the configurations of the inner and outer mould elements determine the configuration of the formed composite moulding.

An anchor point 2 is provided on the inner surface of the inner mould element 1 and one end of a spring-retractable sensor lead 4 is attached to the anchor point 2. The opposite end of the sensor lead 4 is anchored to a spring-loaded cylindrical drum 5. A shaft 6 supported by bearings (not shown) provides a connected drive for the drum 5. A coil spring 7 is fixed to the shaft 6 and provides a clockwise torsion to the drum 5 so that the lead 4 is maintained in tension. The coil spring 7 is attached at its one end to the shaft 6 and has its other end anchored at 8 to a chassis 15 contained within the inner mould element and indicated in outline in Figure 1. A limit switch 14 having an armature 12 is provided with a spring-loaded lever and cam follower assembly 13.

The drum 5 carries a pair of cam segments 10 and 11, and Figure 2A shows the situation which obtains in the undeflected state of the inner mould element 1. Thus the switch 14 is positioned radially so that its lever 13 is compressed as a result of engagement with the outer surfaces of the cam segments 10 and 11. The switch armature 12 is depressed and thus provides an indication that the sensor system is in a steady state, i.e. a non-trigger point, and that the wall of the inner mould element is in its designed, non-deformed state. The positions of the cam segments 10 and 11 on the drum 5 are adjustable so as provide an adjustable cam profile gap. Once set in the required positions, the cam segments 10 and 11 are locked in position by means of a locking screw 9.



Figure 2B shows the wall of the inner mould element 1 deflected inwardly with the anchor point 2 moving in the same direction and by the same amount. The sensor lead 4 therefore retracts onto the drum 5 and allows the drum 5 to rotate clockwise by an extent such that a point on the circumference of the drum 5 moves circumferentially through a distance equal to the lead shortening distance. The switch lever 13 moves into the gap between the profiles of the cam segments 10 and 11 and triggers switch 14.

In use of the system described above, dry fibre in deformable sheet form is placed onto one surface of the mould set. The contra, matching mould is then placed over the first mould so as to close the mould cavity. The inner and outer moulds are clamped together with the aid of vacuum, which is sealed by peripheral mould seals.

Mixed resin and hardener is then pressure fed into the mould cavity by way of a mould port or ports (not shown) strategically positioned in the surface of one of the mould elements. The resin continues to flow through the permeable mould fibre pack until the mould cavity is completely filled.

Unless the resin fill of the mould cavity is velocity and pressure controlled within the limits of mould strength and efficient production, problems of accuracy of the moulded component will occur or there will be a reduced output rate. For example, a pressure or velocity set too high will deflect the mould surfaces apart creating poor or incomplete fill and an increase in thickness of

the moulded component. Similarly, a pressure or velocity set too low will reduce production output and may result in there being too little time to fill the mould before the resin mixture begins to react and harden.

Use of the sensor system described above thus provides a signal from the mould surface to indicate the amount of mould deflection from the desired dimensions. The signal is transmitted to a control box containing means for controlling the pressure and velocity of the resin being fed to the mould cavity. This in turn provides an automatic and safe optimised level of production control by either reducing or increasing their output levels.

It will be appreciated that more than one sensor may be provided and that the different sensors will act on different positions of the chosen mould element, and that sensors may be arranged to act on both mould elements.

The particular arrangement shown in Figures 1, 2A and 2B can readily be set up on any size of mould surface by appropriate adjustment of the initial length of the drum reel lead. The switch 14 is designed to be adjustable radially about the axis of the drum 5 to allow for initial setting of the trigger point, i.e. once the drum chassis 15 has been fixed in position and the lead anchor point 2 has been attached to the selected part of the mould surface, the switch 14 is rotated and locked into a radial position such that a small shortening of the lead 4 due to inward deflection of the mould

1 will trigger the switch lever 13 and provide the controlling signal to stop or reduce the rate of resin mix flow to the mould cavity.

The lead 4 may have additional threaded fixed guide, low friction or roller eyelet points on one or more mould surfaces through which the lead 4 may also pass in sequence between the anchor point 2 and the sensor assembly. This provides multiple sensing of mould surface deflection and can also provide multi-axis sensing from one sensor element.

The diameter of the drum 5 may be reduced in order to provide higher resolution.

The switch 14 can be a simple on-off limit switch and may be electrical, pneumatic or electronic. It may alternatively be a friction-less magnetic, capacitive, light-sensitive or ultrasonic sensing type switch.

The sensor can alternatively be an analogue type using an encoder disc in place of the cam segments. Similarly, a pneumatic analogue signal may be achieved by a rotating disc designed to restrict or increase air flow.

The resin mix flow delivery system can be so arranged that, when it receives a sensor signal, the flow of the resin mix is stopped until the mould deflection returns to a safe level. Alternatively, the flow output is reduced to an optimum level through a standard PID control loop.

In the specific arrangement shown in Figure 1, 2A and 2B, the sensor system is arranged to sense deflection or distortion of the inner mould element 1. It will, of course be appreciated that a similar arrangement may be used to sense deflection or distortion of the outer mould element. In such case, the mould element will deflect outwardly to increase the length of the sensor lead. There would thus be provided a readily available calibrated movement summation at one point that would give the necessary sensor actuation.

Turning next to Figures 3, 4A and 4B, these show an inner mould element 21 having a moulding surface 23 which represents the inner surface half of a matched mould pair.

A spring-loaded telescopic shaft comprising a pole 24 and a slotted outer tube 26 extend between a pair of anchor points 22 on the inner mould element 21. A spring 28 acts between the free end of the pole 24 and an adjustable locking collar 27 carried by the slotted outer tube so that the spring-loaded telescopic shaft 24/26 is maintained in tension between the two anchor points 22.

The length of the telescopic shaft 24/26 is adjusted so that it fits between the two inner mould walls, as shown in the drawings, and the locking collar 27 is so positioned that a small degree of positive spring lengthening tension is provided. The locking collar 27 includes a part which projects through the slot in the tube 26 to provide a reaction surface for the spring 28.

A cam 25 is mounted on the pole 24 and can be set in a desired adjusted position along the length of the pole 24. A switch 29 is mounted on the outer end of the slotted tube 26. The switch 29 has an output lead 30 and a lever 31 positioned for engagement with the cam 25.

In operation, once the spring-loaded telescopic shaft 24/26 has been fitted between the opposing mould walls, the position of the cam 25 is adjusted so that it is in close proximity to the end of the lever 31 of switch 29. The cam 25 is then locked in position and the condition shown in Figure 4A is obtained.

The resin mix is then introduced into the mould cavity and a composite moulding is produced as described above. Figure 4B illustrates the result of inward deflection of the mould walls. The inward distortion of the mould walls shortens the spring-loaded telescopic shaft 24/26 by compressing the spring 28. As the shortening action progresses, the cam 25 moves towards and actuates the switch lever 31 to generate a signal to indicate that a predetermined degree of mould distortion has been detected. The control system then responds to this signal as described above.

Again, any type of linear switching device can be used to provide the output signal in either a digital or an analogue format, i.e. the signal which is generated may depend on the degree of distortion of the mould walls. The arrangement may thus be such that a reading can be obtained indicative of the amount of mould

wall distortion which has been produced during feeding of the resin mix into the mould cavity.

Claims:-

1. A method of making a composite moulding which includes:-

providing a pair of mould elements which define a mould cavity,

feeding a resin mix into the mould cavity, and

providing means for sensing distortion of a mould element and generating an output signal when a predetermined degree of distortion is sensed.

2. A method as claimed in Claim 1, in which the output signal is supplied to control means controlling the feeding of the resin mix into the mould cavity.

3. A method of making a composite moulding substantially as hereinbefore described with reference to and as shown in Figures 1, 2A and 2B of the accompanying drawings.

4. A method of making a composite moulding substantially as hereinbefore described with reference to and as shown in Figures 3, 4A and 4B of the accompanying drawings.

5. A composite closed mould production facility which includes:-

a pair of mould elements which define a mould cavity,

means for feeding a resin mix into the mould cavity,

means for sensing distortion of a mould element, and  
means for generating an output signal when a predetermined  
degree of distortion is sensed.

6. A production facility as claimed in Claim 5, in which the  
means for sensing distortion of the mould element includes a lead  
attached to an anchor point on the mould element and spring  
means acting on the lead.

7. A production facility as claimed in Claim 6, in which the  
lead is connected to a drum carrying cam segments arranged for  
engagement with a switch operating member.

8. A production facility as claimed in Claim 5, in which the  
means for sensing distortion of the mould element includes a  
spring-loaded telescopic shaft extending between two walls of the  
mould element.

9. A production facility as claimed in any one of Claims 5 to 8,  
in which the output signal is supplied to control means controlling  
the feeding of the resin mix into the mould cavity.

10. A composite closed mould production facility substantially  
as hereinbefore described with reference to and as shown in  
Figures 1, 2A and 2B, or Figures 3, 4A and 4B of the accompanying  
drawings.






**ABSTRACT****PRODUCTION OF COMPOSITE MOULDINGS**

A closed mould method of producing composite mouldings is provided. A sensor system (4, 5, 6, 7, 8) is provided for sensing distortion of one (1) of the mould elements while the resin mix is being fed into the mould cavity. A signal is generated if a predetermined degree of distortion is sensed.

(Figure 1)

1/4

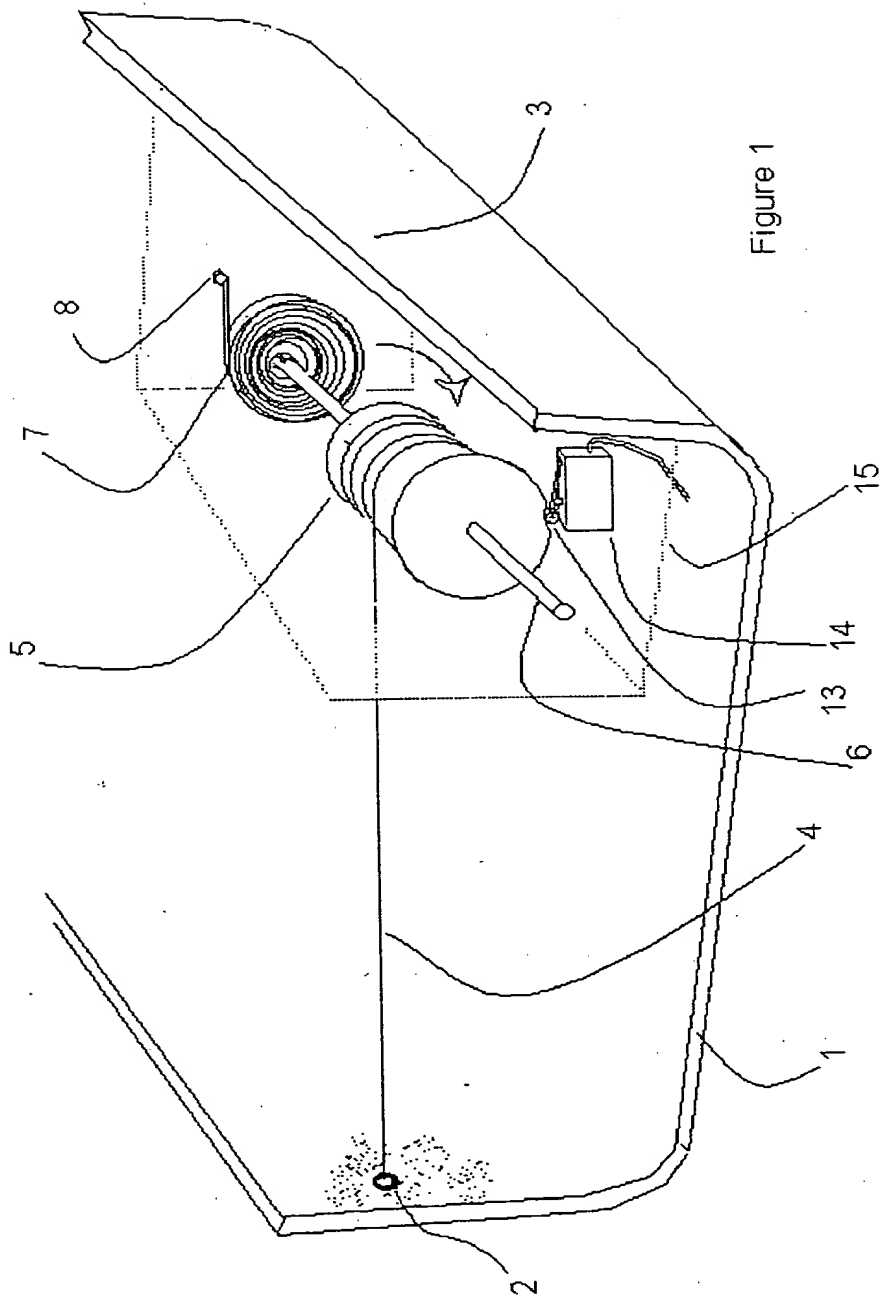

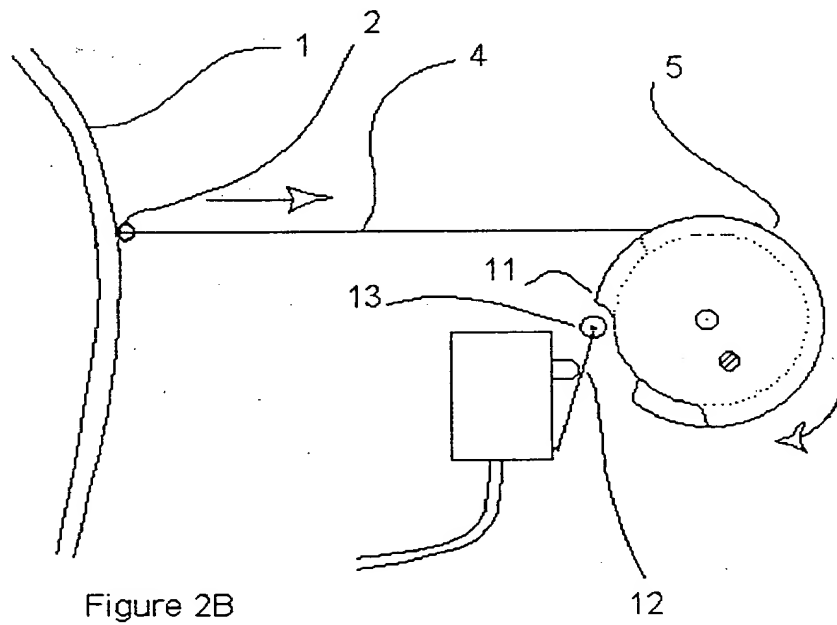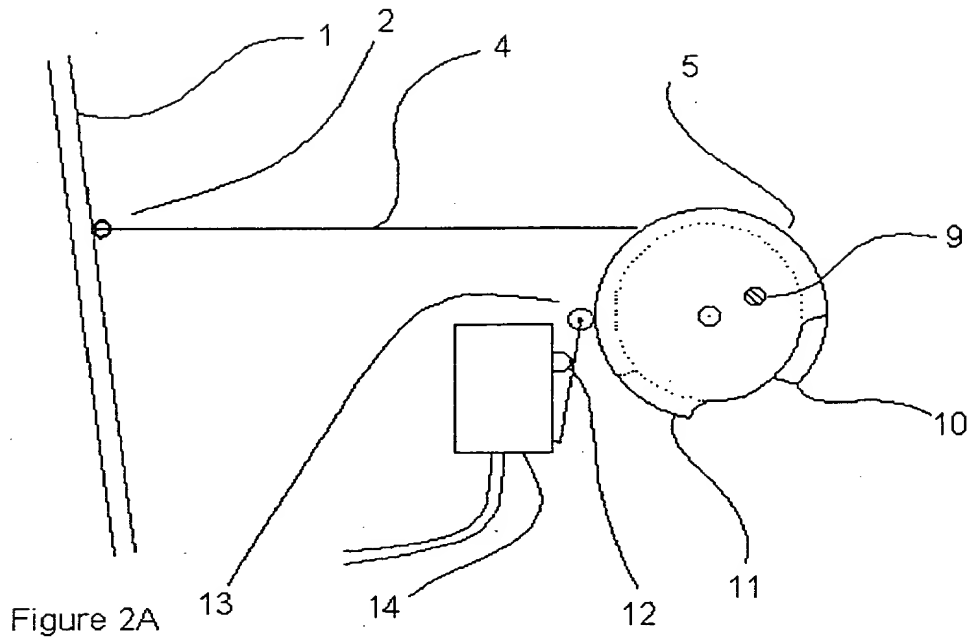

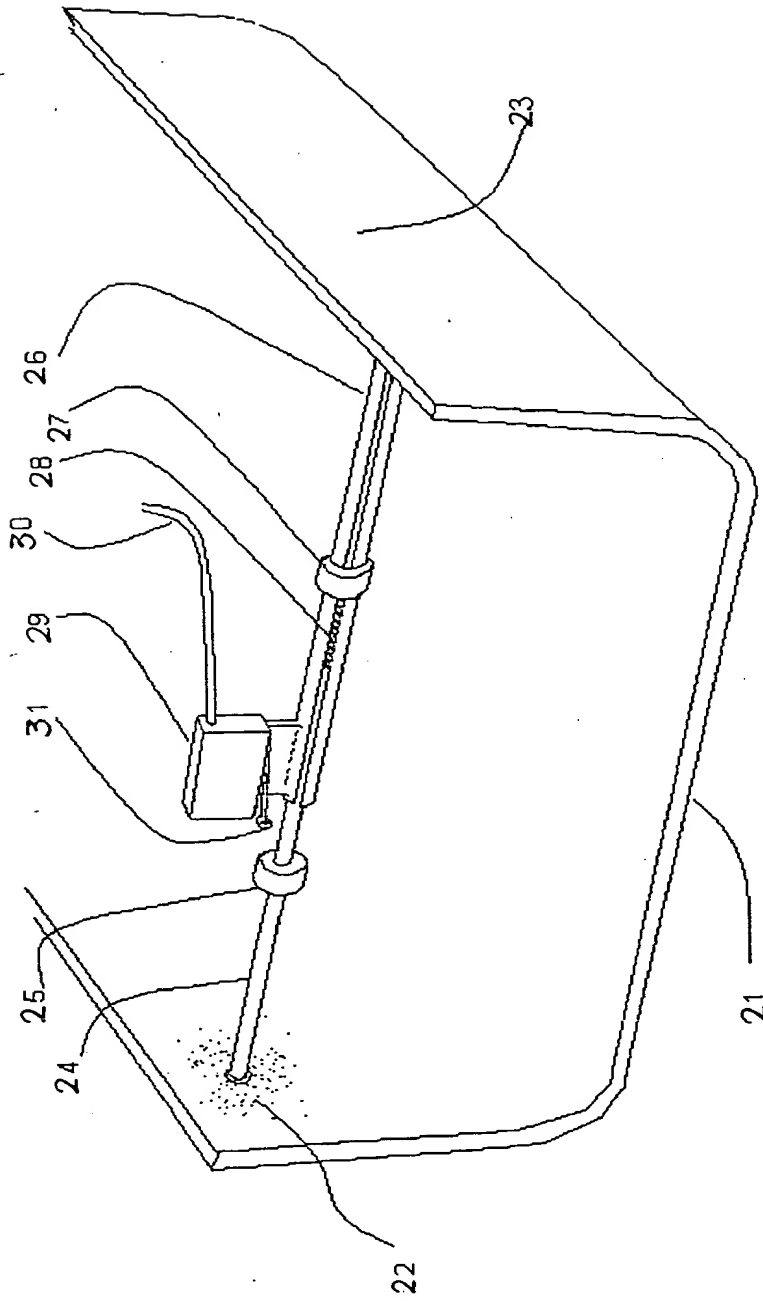


Figure 3

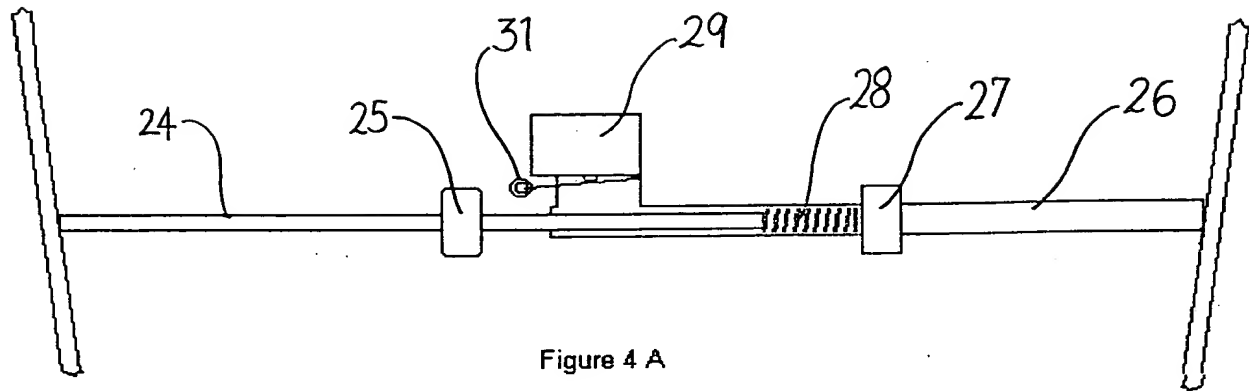


Figure 4 A

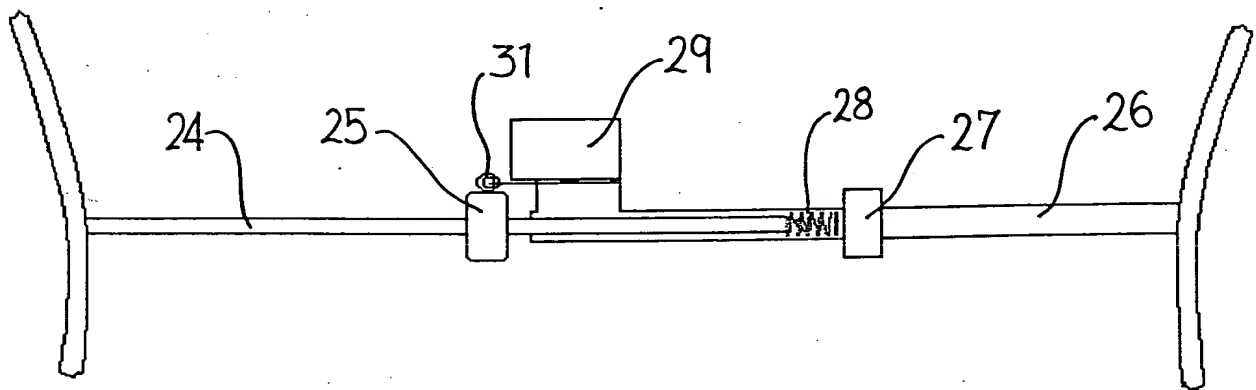


Figure 4B